
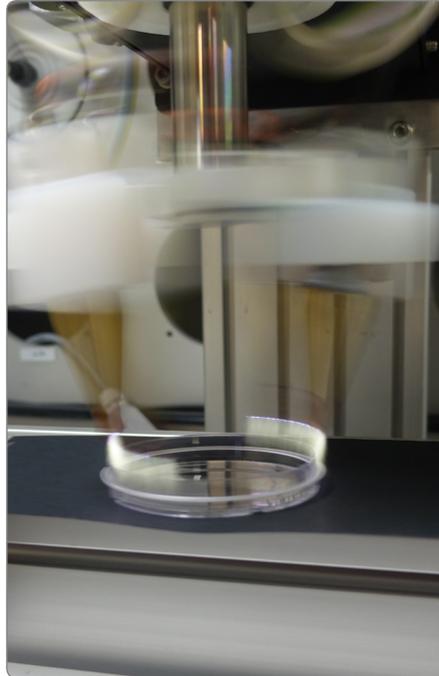


Product Information

SpinTEC | Atmospheric Plasma treater

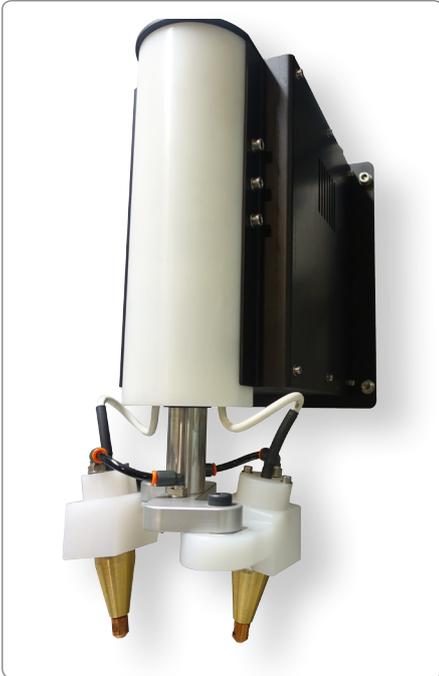

Tantec's New SpinTEC Atmospheric Plasma treatment system is built around the concept of a high voltage DC Plasma discharge in atmospheric air. The versatility of this unit allows for use in fully integrated robotic cells, as a standalone unit, or most any production line.

SpinTEC is with AC motor for spinning of 2 pcs. PlasmaTEC-X nozzles pointing inwards for uniform treatment and to minimize heat impact.

The treatment area is adjustable from 40-150 mm. Connects to standard generator PLX and standard PlasmaREMOTE. The system is able to rotate up to 1000 rpm / min., and it's possible to treat up to 10 m/min.

To ensure proper Plasma Discharge from the Discharge Nozzle the compressed air must be within a certain level of pressure and volume, the new AirTEC system, which is built into the PlasmaTEC-X ensures a constant flow to the Discharge Nozzle at all times. With the AirTEC System the Generator automatically adjusts the air flow of the Discharge nozzle regardless of the cable/hose length.

The AirTEC System in conjunction with the universal power input makes the SpinTEC very user friendly. No adjustments are necessary, simply connect to mains power and compressed air and the unit is ready for use.

Tantec's latest feature now being offered is "Stand-By air low." Through the HMI an operator can set an air flow during stand-by to avoid dust being attracted to the discharge head.

All connections from the SpinTEC Generator to the discharge nozzle is made through a standard plug, making it very easy to connect and use. Thanks to the DC technology and the AirTEC system no adjustments are necessary in case of cable length changes.



Features

Easy to install and use

Fast treatment times

Control signals

Automatic discharge air regulation

Standby air flow

Compact and Light weight

Cost efficient surface treatment

Output discharge control

PlasmaREMOTE



TechnicalData

SpinTEC | Atmospheric Plasma

Easy to install and use

The system must be connected to mains power and compressed air, no adjustment of air or power is necessary.

Potential free discharge

Allows treatment of both conductive, non-conductive as well as semi-conductive surfaces.

High speed treatment

High power impact enables treatment times up to 10 m/min., depending on material.

Control signals

A large number of various signals are available on a digital interface to control and monitor the Plasma discharge at all times.

Automatic discharge air regulation

No matter the length of the power/air cable, the generator will adjust automatically to ensure the correct air pressure and flow.

Compact and Light weight

Compact and light weight makes the SpinTEC easy to integrate in almost any production line or robot cell.

Standby air flown

The air flow is controlled electronically which allows for switching the on/off, A minor flow of air is part of stand-by, to avoid dust being attracted to the discharge nozzle.

Technical Specifications	PlasmaTEC-X Generator	PlasmaREMOTE	SpinTEC
Mains Voltage and Frequency	100-250VAC – 50/60Hz (Universal power Input)	N/A	200-250VAC - 50/60Hz
Output Voltage/Power	550VA	N/A	100 Watt
Ramp up time	10 ms	N/A	N/A
Shut down time	< 1 ms	N/A	N/A
Control interface	M12 (8 pole)	M12 (4 pole)	M12 (8 pole)
Dimensions (WxLxH)mm	150x470x198	125x169x167	210x299x468
Weight in kg	6,1	2,0	12,5 kg
Treatment width in mm	N/A	N/A	40-150 mm
Compressed air supply	5-6 bar, dyr and clean	N/A	N/A
Compressed air connection	OD8mm Quick connection	N/A	N/A
Air consumption	N/A	N/A	66 ltr/min
Capacity	N/A	N/A	10 m/min.
Regulation compliance	CE - RoHS - WEEE	CE - RoHS - WEEE	CE - RoHS - WEEE

International . Tantec A/S Denmark. T: +45 7558 5822 . sales@tantec.com

USA .Tantec EST Inc. T: +1 630 351 1320. USA@tantec.com

Germany South . Tantec Deutschland GmbH (Stuttgart) . T: +49 7044 950012 . wimsheim@tantec.com

Germany North . Tantec Deutschland GmbH (Hamburg) . T: +49 4033 310741. hamburg@tantec.com

www.tantec.com